


SECTION A-A

Max. 600 mm.

- 1 24x24 mm wall angle attached to wall, with screws c/c 300 mm
- 2 24 mm main beam Cross-Lock Unipro, with c/c distance 1200 mm.
- 3 24 mm cross profile Cross-Lock Unipro, c/c distance 600 mm.
- 4 Adjustable hanger c/c distance 1200 mm, but first hanger no more than 300 mm from wall angle
- 5 Cross Lock Connector, c/c distance 600 mm.
- 6 Bracket for connection between wall and grid system at every 2. main beam.
- 7 Wall spring, 2 pcs. for each tile
- 8 12,5 mm Gyptone tiles with edge D2 (perforated / non perforated).

It may be an advantage to use a wooden moulding when attaching the wall angle in order to absorb possible unevennesses of the wall.

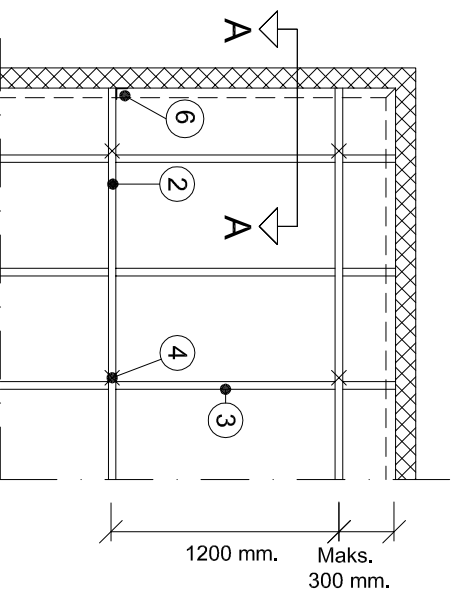

PLAN CUTOUT

Maks.
300 mm.

600 mm.

Maks.
300 mm.

STANDARD DETAIL

System Gyptone edge D2 ceiling

Notation Wall attachment with wall angle, max frise 600 mm.

Scale

1:2

Date

15/04-2015

Rev.

Rev. date

Nr.

D2-001

GYPTONE