


## SECTION A-A

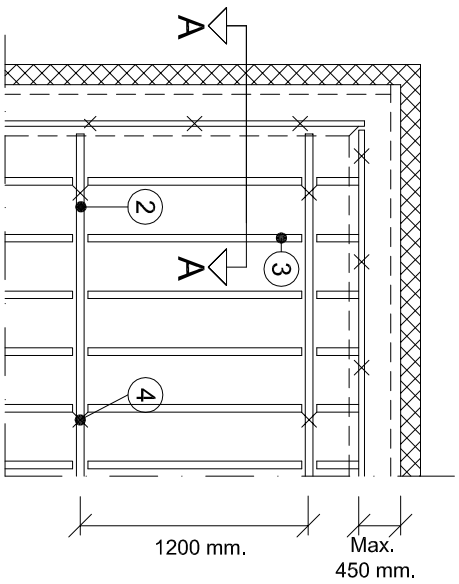

## PLAN CUTOOUT

- 1 Shadow moulding 4140017, attached to GK profile at 300 mm with screw (P14) with pan-head.
- 2 24 mm main beam (Cross-Lock Unipro) 4118181, with cc distance 1200 mm.
- 3 24 mm Cross profile (Cross-Lock Unipro) 4118181, cc distance 300 mm.
- 4 Adjustable hanger with cc distance 1200 mm.
- 5 Cross-Lock connector 4207005, cc distance 300 mm.
- 6 10 mm Gyptone Xtensiv plasterboard with edge E15/B (perforated / not perforated).
- 7 12.5 mm Gyproc plaster board Gyptone BIG Base (jointing supports with steel base plate and fillers/screws).
- 8 Edge rail KS 13.
- 9 Main channel GK-1.
- 10 Adjustable hanger GK 26-27/GK 27, cc distance 900 mm.
- 11 Steel angle H 50/50, attached to wall at 400 mm. with screw with pan-head.
- 12 Gyproc screw QSTR 25, cc distance 300 mm

## STANDARD DETAIL

System Xtensiv ceiling

Notation Frieze with GK system and shadow moulding, max freize width 450 mm.

Scale

1:2

Date

24/09-2014

Rev.

Rev. date

Nr.

X-002

**GYPTONE**